


TL

BUPI CLEANER® TOPLOADER SERIES

The TOPLOADER series serves as the cost-efficient gateway into the world of professional industrial parts cleaning.



Read more on the Toploader TL
www.bupicleaner.com/en/

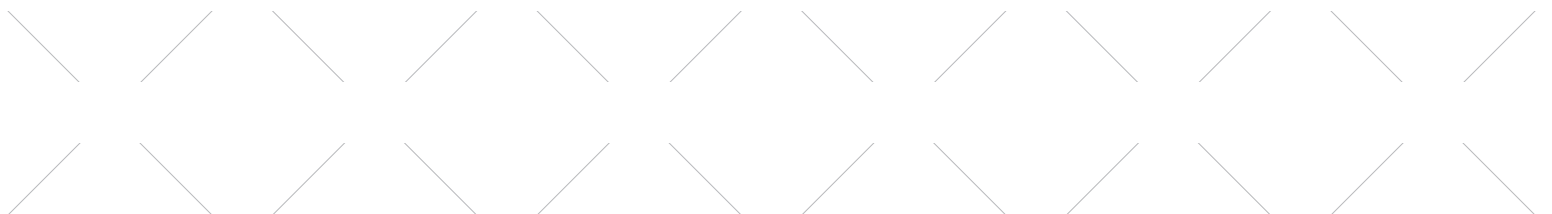

TECHNICAL DATA

STANDARD SIZES WITHOUT ADDITIONAL EQUIPMENT

OVERALL DIMENSIONS	TL 80	TL 100	TL 120
Basket round	1,000 mm	1,000 mm	1,200 mm
Useful height	450 mm	500 mm	700 mm
Width	1,120 mm	1,320 mm	1,520 mm
Depth	920 mm	1,120 mm	1,320 mm
Closed height	1,000 mm	1,200 mm	1,400 mm
Payload	200 kg	250 kg	350 kg
Tank volume	135 l	300 l	430 l
Spray pressure at the nozzles	3.0 bar	3.5 bar	3.5 bar
Recirculation capacity	4,8 m ³ /h	12 m ³ /h	12 m ³ /h
Pump motor	1.1 kW	2.2 kW	2.2 kW
Electrical heating power	4.5 kW	6.0 kW	9.0 kW
Electrical connection	6 kW	8.5 kW	11.5 kW
Max. current consumption	9.5 A	14 A	18.5 A

EQUIPMENT FEATURES:

- Media-contacting parts made of stainless steel
- **Vertically** turning basket
- Motor-driven cleaning basket
- High load capacity (max. 350 kg payload)
- Siemens electrical equipment with control unit
- Highly efficient Grundfos pump

